



MTK. Mordaza roscada para viga







> CERTIFICADOS



> CARACTERÍSTICAS DE PRODUCTO

Material MTK	Hierro de fundición
Acabado MTK	Electrozincado
Material MTKC	Acero
Acabado MTKC	Pregalvanizado

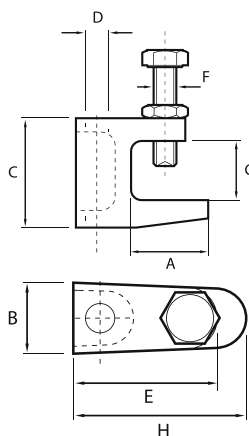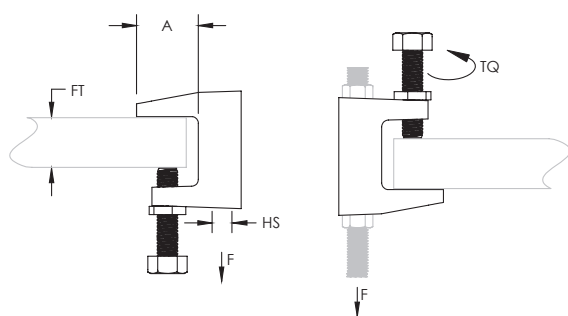

Referencia	G	A	B	C	D	E	F	H	LxW	RS	Carga puntual	Normativa
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	N	
MTK06	18	21	19	35	M6	35	M8	38	-	-	1200	
MTK08	18	21	19	35	M8	35	M8	38	-	-	1200	Vds / ITB
MTK10	20	23	21	42	M10	41	M10	44	-	-	2500	Vds / FM / ITB
MTK12	26	35	23,5	54	M12	48	M10	58	-	-	3500	Vds / FM / ITB
MTKC812	-	-	-	-	-	-	-	-	350 x 25	10	-	-