



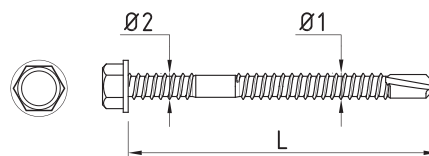

TPA. Tornillo para panel sandwich DK3 y DK5

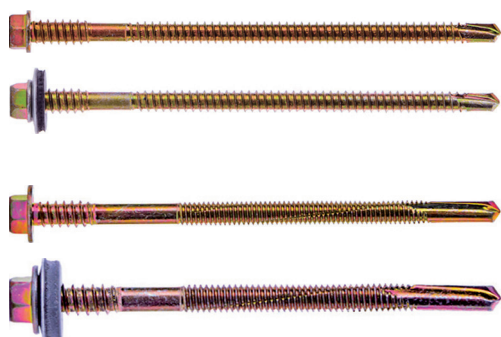

Referencia		Diámetro	Diámetro	Long.	Paso de rosca	Paso de rosca	Punta broca	Espesor panel sandwich	Vaso
Sin equipar	Equipado	Ø 1	Ø 2	L	P1	P2		mm	
		mm	mm	mm	mm	mm			
TPA6355060	TPA6355060E16	5,5	6,3	60	1,8	1,8	DK3	27 - 44	8
TPA6355082	TPA6355082E16	5,5	6,3	82	1,8	1,8	DK3	31 - 68	8
TPA6355098	TPA6355098E16	5,5	6,3	98	1,8	1,8	DK3	48 - 84	8
TPA6355115	TPA6355115E16	5,5	6,3	115	1,8	1,8	DK3	63 - 100	8
TPA6355132	TPA6355132E16	5,5	6,3	132	1,8	1,8	DK3	66 - 115	8
TPA6355150	TPA6355150E16	5,5	6,3	150	1,8	1,8	DK3	86 - 135	8
TPA6355085DK5	TPA6355085DK5E16	5,5	6,3	85	1,05	1,8	DK5	40 - 55	8
TPA6355105DK5	TPA6355105DK5E16	5,5	6,3	105	1,05	1,8	DK5	50 - 75	8
TPA6355115DK5	TPA6355115DK5E16	5,5	6,3	115	1,05	1,8	DK5	55 - 85	8
TPA6355130DK5	TPA6355130DK5E16	5,5	6,3	130	1,05	1,8	DK5	65 - 100	8
TPA6355150DK5	TPA6355150DK5E16	5,5	6,3	150	1,05	1,8	DK5	85 - 120	8
TPA6355190DK5	TPA6355190DK5E16	5,5	6,3	190	1,05	1,8	DK5	125 - 160	8
TPA6355240DK5	TPA6355240DK5E16	5,5	6,3	240	1,05	1,8	DK5	175 - 210	8

> CARACTERÍSTICAS DEL PRODUCTO

Acabado	Bicromatado		
Capacidad de taladro	DK3	1,5 - 6,0 mm	
	DK5	6,0 - 12,0 mm	

> CARGAS ADMISIBLES

Resistencia característica a tracción	Nrk	kN	14,34
Resistencia característica a cortante	Vrk	kN	8,6