





TAH. Tornillo para hormigón



> MATERIALES DE APLICACIÓN

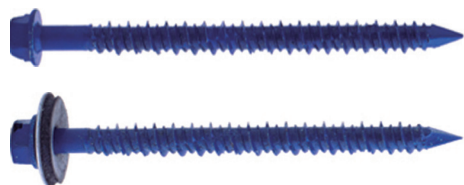

Referencia		Díámetro	Longitud	Espesor a fijar	Taladro	Par máx.
Sin equipar	Equipado P18	Ø	L	Tfix	d0	Tins
		mm	mm	mm	mm	Nm
TAH65032	TAH65032E18	6,5	32	2	5	12
TAH65045	TAH65045E18	6,5	45	15	5	12
TAH65057	TAH65057E18	6,5	57	27	5	12
TAH65070	TAH65070E18	6,5	70	40	5	12
TAH65080	TAH65080E18	6,5	80	50	5	12
TAH65100	TAH65100E18	6,5	100	70	5	12
TAH65125	TAH65125E18	6,5	125	95	5	12
TAH65150	TAH65150E18	6,5	150	120	5	12

> CARACTERÍSTICAS DEL PRODUCTO

Material	Acero especial SAE J403 1022
Dureza superficial	>500 HV
Dureza núcleo	240 - 450 HV
Profundidad dureza	0,10 - 0,23 mm

> CARGAS ADMISIBLES

Carga recomendada	Nrk	kN	0,65
-------------------	-----	----	------